

A collection of industrial components. On the left, there are six metal clamps of various sizes, each with a central circular hole and mounting tabs. To the right, there is a hose reel consisting of a black flexible hose coiled around a metal frame with a handle. Below the reel are two metal fittings and a wrench. At the bottom, a long black flexible hose is shown, with its end featuring multiple metal connectors.

Accessories

Protective coils, sleeves

900564 Steel coil spring.	K-2
900705 Steel coil sleeve	K-2
900952 Plastic coil spring	K-2
222005 Stainless steel internal support coil	K-2
222022 Internal support coil	K-2
FC425 Nylon abrasive sleeve	K-3
624 Firesleeve	K-3
FF9217 Firesleeve clamp.	K-3
FF90754 Guardian sleeve.	K-4

Clamps

900729 Support clamp.	K-5
FF90311 Heavy duty support clamp	K-5

Hose protectors

HP4 Hose protector	K-6
HP6 Hose protector	K-6
HP8 Hose protector	K-6
HPM Hose protector	K-6
FF90308 Hose Insertion gage	K-6
HSM-48 Hose spacer.	K-6
HSM-48 Hose spacers	K-6
HLM-48 Hose looms	K-6
Flaretite® seals	K-7

Accessories to hose chart.	K-8
---	------------

K




Accessories

Protective coils, sleeves

K

900564 Steel protective coil spring



Protects hose cover and reinforcement from abrasion and accidental damage.

Construction: steel wire, rust resistant.

This coil should fit snugly to the hose O.D. expanding the coil I.D. (unwind the coil) may be necessary for proper installation.

**For use with hose:
see pages K-8–K-14**

Sleeve dash number	Sleeve I.D.	
	mm	in.
-1S	15,5	0.61
-12S	17,0	0.67
-2S	19,0	0.75
-15S	20,6	0.81
-14S	21,6	0.85
-3S	23,1	0.91
-4S	26,4	1.04
-5S	30,0	1.18
-6S	34,0	1.34
-7S	42,2	1.66
-9S	47,5	1.87
-8S	54,1	2.13
-10S	60,4	2.38
-13S	69,8	2.75
-11S	73,1	2.88

900705 Steel protective coil sleeve



Recommended for use where hose lines are subjected to excessive abrasion, kinking or accidental damage.

Construction: spring steel, rust resistant.

This coil should fit snugly to the hose O.D. expanding the coil I.D. (unwind the coil) may be necessary for proper installation.

**For use with hose:
see pages K-8–K-14**

Sleeve dash number	Sleeve I.D.	
	mm	in.
-17S	11,2	0.44
-1S	12,7	0.50
-13S	14,5	0.57
-2S	16,0	0.63
-3S	19,0	0.75
-4S	22,3	0.88
-5S	26,2	1.03
-14S	28,7	1.13
-6S	31,0	1.22
-7S	37,3	1.47
-9S	42,9	1.69
-8S	48,5	1.91
-10S	54,1	2.13
-16S	62,0	2.44
-11S	65,0	2.56

900952 Plastic protective coil spring



Recommended to protect hose from abrasion, this light weight plastic sleeve is unaffected by air, water, oil, gasoline, hydraulic and most other fluids. This coil can also be used for group bundling of hose lines.

Temperature range of 0°F to +180°F.

**For use with hose:
see pages K-8–K-14**

Part number	Sleeve I.D.	
	mm	in.
900952-30	40,0	1.58
900952-22	34,0	1.34
900952-16	27,0	1.06
900952-12	21,0	0.83
900952-10	16,0	0.63
900952-8	12,5	0.49
900952-6	9,5	0.37
900952-4	6,0	0.24

222005*, 222022 Stainless steel internal support coils



Recommended for vacuum service with most hose.

**For use with hose:
see pages K-8–K-14**

Part number O.D.	Coil	
	mm	in.
222005-23C	8,6	0.34
222005-10C	10,7	0.42
222005-21C	12,9	0.51
222005-11C	15,2	0.60
222022-12C	17,8	0.70
222005-13C	18,5	0.73
222005-14C	23,9	0.94
222022-16C	24,6	0.97
222005-15C	30,2	1.19
222022-20C	31,7	1.25
222005-17C	36,6	1.44
222022-24C	38,1	1.50
222005-18C	47,7	1.88
222022-32C	50,0	1.97
222005-19C	62,0	2.44
222022-40C	67,8	2.67
222022-48C	83,0	3.27
222022-60C	108,7	4.28
222022-80C	134,1	5.28

*222005 is 301 stainless steel.

FC425 Nylon abrasion sleeve

Meets MSHA requirements

Nylon sleeve protects hose from abrasion and allows bundling of hose lines.



For use with hose: see pages K-8-K-14

Part number	Nominal Sleeve I.D.* "B"	
	mm	in.
FC425-12	18,0	0.71
FC425-16	25,4	1.00
FC425-18	28,7	1.13
FC425-20	31,7	1.25
FC425-24	40,4	1.59
FC425-28	44,4	1.75
FC425-32	52,6	2.07
FC425-38	60,4	2.38
FC425-40	64,5	2.54
FC425-46	72,6	2.86
FC425-54	84,8	3.34
FC425-59	93,0	3.66

* The maximum O.D. of hose fittings must be allowed for if fittings are to be covered.

624 Firesleeve

Firesleeve will protect hose from direct flame. Firesleeve is constructed of a uniform single layer of braided fiberglass tubing impregnated with flame resistant silicone rubber. Temperature range of -65°F to +500°F.



For use with hose: see pages K-8-K-14

Part number	I.D.		Clamp # (2 required)
	mm	in.	
624-5	7,9	0.31	FF9217-0622S
624-7	11,2	0.44	FF9217-0622S
624-8	12,7	0.50	FF9217-0622S
624-9	14,2	0.56	FF9217-0622S
624-10	15,7	0.62	FF9217-0622S
624-11	17,5	0.69	FF9217-0622S
624-12	19,0	0.75	FF9217-0622S
624-13	20,6	0.81	FF9217-0622S
624-14	22,3	0.88	FF9217-0622S
624-16	25,4	1.00	FF9217-0622S
624-18	28,4	1.12	FF9217-0622S
624-20	31,7	1.25	FF9217-0648S
624-22	35,0	1.38	FF9217-0648S
624-24	38,1	1.50	FF9217-0648S
624-26	41,1	1.62	FF9217-0648S
624-28	44,4	1.75	FF9217-0648S
624-30	47,7	1.88	FF9217-0648S
624-32	50,8	2.00	FF9217-0648S
624-38	60,4	2.38	FF9217-0648S
624-42	66,5	2.62	FF9217-0648S
624-46	73,1	2.88	FF9217-0664C
624-50	79,2	3.12	FF9217-0664C
624-54	85,8	3.38	FF9217-0664C
624-60	95,2	3.75	FF9217-0664C

FF9217 Firesleeve clamp



Recommended for attaching 624 Firesleeve to hose lines.

Clamp numbers:

FF9217-0622S, FF9217-0648S; 3/8 inch wide

FF9217-0664C; 1/2 inch wide.

For use with hose: see pages K-8-K-14

Accessories

Protective coils, sleeves

K

FF90754

Guardian sleeve

Eaton's new Guardian Sleeve is designed to provide protection against hydraulic hose failure by containing pressure and fluids that may escape during a hose burst or pinhole leak.

Properties	Specification	Description
Burst pressure	16,000 psi	Capable to contain hose burst up to 16,000 psi
Pin hole leak pressure	4,000 psi	Sustained 4,000 psi pin hole deflection from focused 1mm pin hole
Abrasion cycles	250,000 psi	Holds up to 250,000 abrasion cycles per ISO 6945



Denier: 1260

Melting Point: 215°C/420°F

Material: Polyamide 6, made with pre-dyed yarn

Dim. Stability: Great resistance to sun, atmospheric agents and aging

Toxicity: Non-Toxic

Color: Black

Packing Requirements: Eaton Guardian Sleeve comes in a 300 foot roll with no more than 3 cuts per roll and no piece shorter than 30 feet. Note must be ordered by the roll.

General and dimensional information

Part number	Nominal I.D. (in)	A – Flat Width (in) +/- 0.125	Weights in lbs per 300 ft Roll	Rolls per box
FF90754-68	0.68	1.290	7.43	8
FF90754-79	0.79	1.400	8.50	7
FF90754-91	0.91	1.590	9.70	6
FF90754-98	0.98	1.590	10.13	6
FF90754-106	1.06	1.825	11.10	5
FF90754-122	1.22	2.076	12.60	4
FF90754-142	1.42	2.390	14.50	4
FF90754-157	1.57	2.650	16.10	3
FF90754-173	1.73	2.910	17.70	3
FF90754-185	1.85	3.100	18.80	3
FF90754-209	2.09	3.470	21.10	2
FF90754-219	2.19	3.630	22.10	2
FF90754-238	2.38	3.925	23.90	2
FF90754-288	2.88	4.714	28.60	2
FF90754-366	3.66	5.938	36.10	1

Guardian sleeve chemical compatibility

Chemical	Compatibility
Gasoline	Very Good
Oil	Very Good
Mineral and Vegetable Oil	Very Good
Ionic Metallic Solutions	Very Good
Alcohols	Very Good
Diluted Bases	Very Good
Diluted acids *	Good
Benzene Very	Good
Acetone	Very Good
Ether	Very Good
Carbon Tetrachloride	Very Good
Chlorine Based Solvent	Very Good
Mold, Bacteria, Moths	Very Good

*Strong and concentrated acids; ie. Hcl or Formic Acid may have some corrosive action.

Guardian sleeve selection chart

Suggested sleeve Part number	Sleeve I.D. (in)	Max hose OD that sleeve can accept (in)	Hose size as a ref.
FF90754-68	0.68	0.52	-4
FF90754-79	0.79	0.61	-4
FF90754-91	0.91	0.70	-6
FF90754-98	0.98	0.76	-6
FF90754-106	1.06	0.80	-6
FF90754-122	1.22	0.92	-8
FF90754-142	1.42	1.02	10
FF90754-157	1.57	1.13	10
FF90754-173	1.73	1.24	12
FF90754-185	1.85	1.34	16
FF90754-209	2.09	1.50	16
FF90754-219	2.19	1.54	20
FF90754-238	2.38	1.70	20
FF90754-288	2.88	2.00	20
FF90754-366	3.66	2.40	24

Assembly Instructions

1. Select the correct sleeve part number for the hose.
2. Cut the sleeve 2 inches longer than the cut length of the hose to allow full hose bend radius.
3. The ends of the sleeves must be seared to prevent sleeve from fraying.
4. Slide the sleeve over the hose.
5. Properly assemble the hose ends.
6. Secure the sleeve over hose sockets with a metal banding product.

900729

Support clamp

These lightweight vinyl-coated steel support clamps are designed to support hose where long runs are necessary.

This clamp not only furnishes a cleaner installation, but prevents damage, exposure and chafing.

The lining will withstand high ambient temperatures.

Bolt hole dia: Clamp dash no. -01 thru -8, -18 thru -23 is .406; -9 thru -17, -24 thru -31 is .531.



For use with hose: see pages K-8-K-14

Clamp dash no.	Clamp I.D. Closed	
	mm	in.
-18	6,3	0.25
-19	9,6	0.38
-01	11,2	0.44
-1	12,7	0.50
-2	14,2	0.56
-21	16,0	0.63
-3	17,5	0.69
-4	19,0	0.75
-5	20,6	0.81
-6	23,9	0.94
-23	25,4	1.00
-8	26,9	1.06
-9	28,7	1.13
-27	30,2	1.19
-24	31,7	1.25
-25	33,3	1.31
-10	38,1	1.50
-11	39,6	1.56
-12	44,4	1.75
-28	46,0	1.81
-13	50,8	2.00
-29	52,3	2.06
-14	57,1	2.25
-30	63,5	2.50
-31	66,8	2.63
-15	69,8	2.75
-16	73,1	2.88
-17	90,4	3.56

FF90311

Heavy duty hose support clamps

These heavy duty weld-based clamps are designed to securely hold hose in applications subject to impulsing, flexing and vibrating conditions. The clamps help prevent abrasion and extend hose life through proper routing. Clamps are rated to ambient temperature of +250°F.



For use with hose: see pages K-8-K-14

Clamp P/N	Inside diameter	
	mm	in.
FF90311-127	12,7	0.50
FF90311-137	13,7	0.54
FF90311-150	15,0	0.59
FF90311-160	16,0	0.63
FF90311-171	17,1	0.67
FF90311-174	17,4	0.69
FF90311-190	19,0	0.75
FF90311-205	20,5	0.81
FF90311-222	22,2	0.87
FF90311-239	23,9	0.94
FF90311-254	25,4	1.00
FF90311-266	26,6	1.05
FF90311-280	28,0	1.10
FF90311-300	30,0	1.18
FF90311-320	32,0	1.26
FF90311-334	33,4	1.31
FF90311-357	35,7	1.41
FF90311-381	38,1	1.50
FF90311-400	40,0	1.57
FF90311-422	42,2	1.66
FF90311-445	44,5	1.75
FF90311-483	48,3	1.90
FF90311-508	50,8	2.00
FF90311-572	57,2	2.25
FF90311-635	63,5	2.50
FF90311-700	70,0	2.76

Accessories

Hose protectors

K

HP4, HP6, HP8 and HPM

Hose protectors

Easy installation in minutes – no need to remove hose, formulated to resist solvents, oils, grease and gasoline.



*Hose protectors available in black, orange or yellow.

Part number	Description
HP4*	4" Hose Protector Case of 50
HP6*	6" Hose Protector Case of 50
HP8*	8" Hose Protector Case of 50
HPM*	Mixed Hose Protectors Case of 60

Features:

- Operating temperature range is -40° to 430°F.
- Exceptionally cost effective
- Packed in easy to assemble, colorful, counter display box
- Available in 3 sizes – 4", 6" and 8" – cable ties included

Market applications:

- Farming
- Industrial
- Trucking
- Mining
- Construction
- Aviation support
- Road maintenance
- Waste management
- Original equip. manuf.

HSM-48

Hose spacers



Part number	Description
HSM-48	Case of 48 mixed Hose Spacers

Features:

- Prevents hose abrasion at points of contact
- Helps keep hoses organized Prevents damage from unrestrained hoses
- Available in 4 sizes – 3/4", 1", 1-1/8", 1-3/8"
- Packed in colorful counter display boxes of 48 – cable ties included
- Also available in mixed boxes of 48 (12 each size) or refill bags of 12

FF90308

Hose insertion gages

Improve hose assembly reliability with these easy to use aluminum gages that are designed to ensure proper fitting depth during pre-assembly.

Simply bottom the hose in the appropriately marked cavity and scribe a mark on the hose flush with the top surface of the gauge. Insert the fitting until the back of the socket is aligned with scribe line.



For use with all hoses that mate with TTC, TTC12 and Global Spiral TTC fittings

For use with hose: see pages 300-308.

Part number	Usage
FF90308-01	For use with all hoses that mate with -4 through -16 TTC and TTC12 fittings
FF90308-02	For use with all hoses that mate with -20 through -32 TTC and TTC 12 fittings
FF90308-03	For use with all hoses that mate with -12, -16, -20 Spiral TTC fittings
FF90308-04	For use with all hoses that mate with -06, -08, -10, -12, -16 spiral 4S/6S fittings
FF90308-05	For use with all hoses that mate with -20, -24, -32 spiral 4S/6S fittings

HLM-48

Hose looms



Part number	Description
HLM-48	Case of 48 mixed Hose Looms

Features:

- Prevents hose abrasion at points of contact
- Keeps multiple hoses organized
- Simplifies hose routing
- Prevents damage from unrestrained hoses
- Available in 4 sizes – 3/4", 1", 1-1/8", 1-3/8"
- Packed in colorful counter display boxes of 48
- Also available in mixed boxes of 48 (12 each size) or refill bags of 12

Flaretite® seals




The ideal product to enhance new installations of SAE 37° connections, as well as seal off minor leaks and weeping connections.

Features

- Ribbed insert design
- Coated with Loctite® sealant
- Economical method to reduce minor leaks and weeping connections
- Built-in clip to attach the Flaretite seal to the nose of the SAE 37 degree connection
- Available sizes: -04 through -32

Benefits

- Multiple surface contact points
- Locks the joint and fills surface imperfections
- Saves time & money associated with maintenance and rework
- Quick & easy assembly

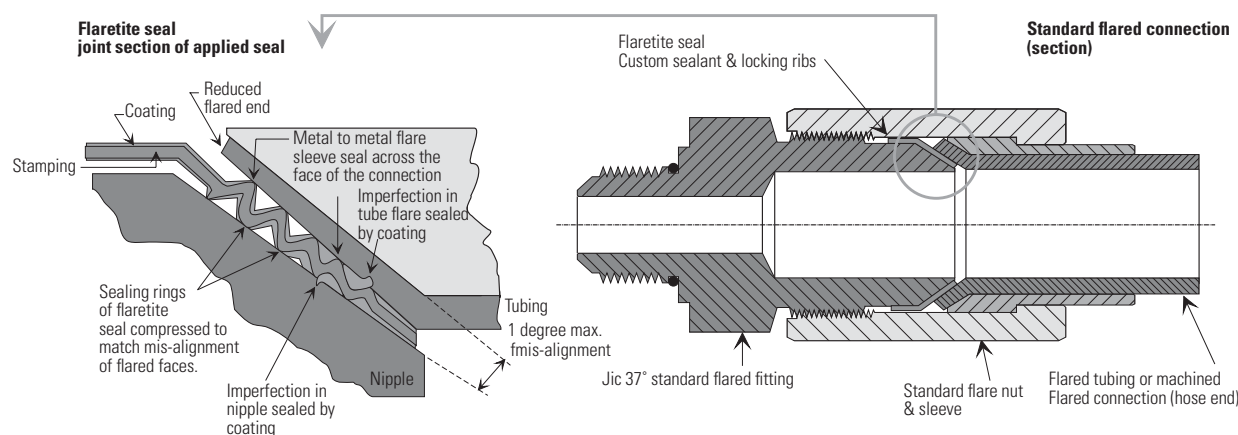

Seal size	Package part number	Number of seals per package
-04	FF13267	100
-06	FF13268	100
-08	FF13269	100
-10	FF13270	100
-12	FF13271	100
-16	FF13272	50
-20	FF13273	50
-24	FF13570	25
-32	FF13571	10

Assembly and torque requirements

To assemble an SAE 37° connection using a Flaretite seal, simply push the Flaretite seal onto the male portion of the connection. The built-in clip will hold the Flaretite seal onto the male half.

During assembly ensure:

- The seal is fitted squarely to the conical nose of the JIC fitting -37° flare.
- The sealing faces of the flared connector part are clean and free of burrs.
- The flared joint is correctly tightened with recommended torque settings noted below.

Recommended torque settings:

Tolerance: +10% -0%

-04 (1/4")	SAE 37°: 14lb-ft.	-10 (5/8")	SAE 37°: 80lb-ft.	-20 (1-1/4")	SAE 37°: 190lb-ft.
-06 (3/8")	SAE 37°: 26lb-ft.	-12 (3/4")	SAE 37°: 110lb-ft.	-24 (1-1/2")	SAE 37°: 220lb-ft.
-08 (1/2")	SAE 37°: 55lb-ft.	-16 (1")	SAE 37°: 140lb-ft.	-32 (2")	SAE 37°: 325lb-ft.

* Flaretite is a registered trademark of Flaretite Inc.

All photos and the name Flaretite are the property of Flaretite Inc.

** Loctite is a registered trademark of Henkel Loctite Corporation.

Accessories

Accessories to hose chart

K

Accessories to hose chart

Hose Part #	Steel protective coil spring* 900564	Steel protective coil sleeve* 900705	Plastic coil sleeve 900952	Internal support coil 222005, 222022	Support clamp 900729	Heavy duty support clamp FF90311	Nylon sleeve* FC425	Firesleeve* 624	Firesleeve clamp FF9217	Guardian sleeve FF90754
										
	dash size	dash size	dash size		dash size	dash size	dash size	dash size	dash size	dash size
1503-4	-1S	-1S	-6	-	-1	-137	-12	-11	-0622S	68
1503-5	-12S	-13S	-8	-	-2		-12	-12	-0622S	79
1503-6	-2S	-2S	-10	-	-21	-174	-16	-14	-0622S	91
1503-8	-14S	-3S	-12	222005-10C	-4	-190	-16	-16	-0622S	106
1503-10	-4S	-4S	-12	222005-21C	-6	-239	-20	-18	-0630S	122
1503-12	-5S	-5S	-16	222005-13C	-8	-280	-20	-20	-0630S	157
1503-16	-6S	-6S	-16	222005-14C	-27	-320	-24	-24	-0648S	173
1503-20	-7S	-7S	-22	222005-15C	-10	-381	-28	-30	-0648S	209
1503-24	-9S	-9S	-22	222005-17C	-12	-445	-32	-32	-0648S	238
1503-32	-10S	-10S	-30	222005-18C	-14	-572	-38	-38	-0648S	366
1503-40	-	-12S	-	222005-19C	-16	-	-	-	-	-
1531-10	-4S	-4S	-12	-	-6	-239	-20	-16	-0622S	142
1531-12	-5S	-5S	-16	-	-8	-280	-20	-20	-0630S	173
1531-16	-7S	-6S	-16	-	-25	-357	-24	-24	-0630S	209
1531-20	-7S	-7S	-22	-	-10	-422	-28	-30	-0648S	238
2550-6	-14S	-3S	-10	-	-4	-174	-16	-13	-0622S	98
2554-6	-14S	-2S	-10	-	-4	-174	-16	-13	-0622S	98
2556-10	-4S	-4S	-12	-	-5	-222	-16	-16	-0622S	122
2556-12	-5S	-5S	-16	-	-23	-266	-20	-18	-0630S	157
2556-4	-1S	-1S	-6	-	-1	-127	-12	-9	-0622S	68
2556-6	-12S	-13S	-8	-	-21	-160	-16	-11	-0622S	91
2556-8	-14S	-3S	-10	-	-4	-190	-16	-13	-0622S	98
2565-10	-4S	-4S	-12	-	-6	-239	-16	-16	-0622S	142
2565-12	-5S	-5S	-16	-	-8	-280	-20	-18	-0630S	157
2565-4	-1S	-1S	-6	-	-1	-127	-12	-9	-0622S	68
2565-6	-12S	-13S	-8	-	-21	-160	-16	-11	-0622S	91
2565-8	-14S	-3S	-10	-	-4	-205	-16	-13	-0622S	106
2570-10	-5S	-5S	-16	222005-13C	-8	-239	-20	-20	-0648S	157
2570-6	-14S	-3S	-10	-	-4	-174	-16	-13	-0622S	98
2570-8	-4S	-4S	-12	222005-11C	-6	-190	-16	-18	-0622S	122
2580-10	-4S	-4S	-12	222005-21C	-6	-239	-20	-18	-0630S	122
2580-12	-5S	-5S	-16	222005-13C	-8	-280	-20	-20	-0630S	157
2580-16	-6S	-6S	-16	222005-14C	-27	-320	-24	-24	-0648S	173
2580-20	-7S	-7S	-22	222005-15C	-10	-381	-28	-28	-0648S	209
2580-24	-9S	-9S	-22	222005-17C	-12	-445	-32	-32	-0648S	288
2580-32	-10S	-10S	-30	222005-18C	-14	-572	-40	-42	-0648S	366
2580-4	-1S	-1S	-6	-	-1	-127	-12	-11	-0622S	68
2580-6	-2S	-2S	-10	-	-21	-174	-16	-14	-0622S	91
2580-8	-14S	-3S	-12	222005-10C	-4	-190	-16	-16	-0622S	106

*Sizes indicated are based on Hose O.D. only. If sleeve is to be placed over fittings, a larger sleeve size may be required, depending on type of fitting used.

Hose Part #	Steel protective coil spring* 900564	Steel protective coil sleeve* 900705	Plastic coil sleeve 900952	Internal support coil 222005, 222022	Support clamp 900729	Heavy duty support clamp FF90311	Nylon sleeve* FC425	Firesleeve* 624	Firesleeve clamp FF9217	Guardian sleeve FF90754
										
	dash size	dash size	dash size		dash size	dash size	dash size	dash size	dash size	dash size
2583-12	-6S	-14S	-16	-	-24	-320	-24	-24	-0648S	173
2583-16	-7S	-7S	-22	-	-10	-381	-28	-28	-0648S	209
2583-20	-8S	-9S	-22	-	-12	-445	-32	-32	-0648S	288
2583-4	-1S	-1S	-8	-	-2	-150	-12	-11	-0622S	79
2583-6	-14S	-3S	-10	-	-4	-190	-16	-16	-0622S	98
2583-8	-4S	-4S	-12	-	-6	-239	-20	-20	-0648S	142
2651-10	-4S	-4S	-12	222005-21C	-6	-239	-20	-18	-0630S	122
2651-12	-5S	-5S	-16	222005-13C	-8	-280	-20	-20	-0630S	157
2651-16	-6S	-6S	-16	222005-14C	-27	-320	-24	-24	-0648S	173
2651-20	-7S	-7S	-22	222005-15C	-10	-381	-28	-30	-0648S	209
2651-24	-9S	-9S	-22	222005-17C	-12	-445	-32	-32	-0648S	238
2651-32	-10S	-10S	-30	222005-18C	-14	-572	-38	-42	-0648S	366
2651-4	-1S	-1S	-6	-	-1	-137	-12	-11	-0622S	68
2651-40	-	-12S	-	222005-19C	-16	-	-54	-50	-0664C	-
2651-5	-12S	-13S	-8	-	-2	-	-12	-12	-0622S	79
2651-6	-2S	-2S	-10	-	-21	-174	-16	-14	-0622S	91
2651-8	-14S	-3S	-12	222005-10C	-4	-190	-16	-16	-0622S	106
2661-48	-	-	-	-	-	-	-59	-60	-0664C	-
2661-64	-	-	-	-	-	-	-	-	-	-
2681-3	-1S	-1S	-6	-	-1	-	-12	-11	-0622S	68
2681-4	-12S	-13S	-8	-	-21	-160	-16	-12	-0622S	68
2681-5	-2S	-2S	-8	-	-3	-	-16	-14	-0630S	91
2681-6	-14S	-3S	-10	-	-4	-205	-16	-18	-0630S	106
2681-8	-4S	-4S	-12	-	-5	-222	-20	-20	-0630S	122
2681-10	-5S	-5S	-12	-	-23	-266	-20	-20	-0630S	157
2681-12	-6S	-14S	-16	222005-14C	-27	-300	-24	-22	-0648S	173
2681-16	-7S	-7S	-22	222005-15C	-10	-381	-28	-28	-0648S	209
2681-20	-8S	-9S	-22	222005-17C	-28	-445	-32	-38	-0648S	288
2681-24	-10S	-15S	-30	222005-18C	-29	-508	-38	-38	-0648S	288
2681-32	-13S	-11S	-30	222005-19C	-31	-635	-46	-46	-0664C	-
2781-4	-2S	-2S	-8	-	-3	-174	-16	-14	-0622S	91
2781-6	-3S	-3S	-12	-	-5	-222	-16	-16	-0630S	122
2781-8	-4S	-4S	-12	-	-6	-239	-20	-18	-0630S	142
2781-10	-5S	-5S	-16	-	-8	-280	-20	-20	-0630S	157
2781-12	-6S	-6S	-16	-	-24	-320	-24	-26	-0648S	185
2781-16	-7S	-7S	-22	-	-11	-400	-28	-30	-0648S	238
2781-20	-8S	-8S	-30	-	-13	-508	-38	-38	-0648S	288
2781-24	-10S	-10S	-30	-	-14	-572	-40	-42	-0648S	366
2781-32	-11S	-11S	-30	-	-15	-700	-54	-46	-0664C	-
2807-5	-	-	-4	-	-19	-	-	-9	-0622S	68
2807-6	-	-17S	-6	222005-23C	-1	-	-	-10	-0622S	68

*Sizes indicated are based on Hose O.D. only. If sleeve is to be placed over fittings, a larger sleeve size may be required, depending on type of fitting used.

Accessories

Accessories to hose chart

K

Hose Part #	Steel protective coil spring* 900564	Steel protective coil sleeve* 900705	Plastic coil sleeve 900952	Internal support coil 222005, 222022	Support clamp 900729	Heavy duty support clamp FF90311	Nylon sleeve* FC425	Firesleeve* 624	Firesleeve clamp FF9217	Guardian sleeve FF90754
										
	dash size	dash size	dash size		dash size	dash size	dash size	dash size	dash size	dash size
2807-8	-1S	-1S	-8	222005-10C	-1	-137	-12	-12	-0622S	79
2807-10	-2S	-3S	-8	222005-21C	-21	-160	-16	-14	-0630S	91
2807-12	-2S	-3S	-10	222005-13C	-4	-190	-16	-16	-0630S	98
2807-16	-3S	-5S	-12	222005-14C	-23	-266	-20	-20	-0630S	157
2807-20	-5S	-6S	-16	222005-15C	-24	-320	-24	-24	-0648S	185
2808-8	-12S	-1S	-6	222005-10C	-2	-150	-12	-16	-0622S	79
2808-10	-2S	-2S	-8	222005-21C	-3	-174	-16	-18	-0630S	91
2808-12	-14S	-3S	-10	222005-13C	-5	-205	-16	-20	-0630S	122
2808-16	-5S	-5S	-16	222005-14C	-8	-280	-20	-26	-0648S	157
2808-20	-7S	-6S	-16	222005-15C	-25	-334	-24	-32	-0648S	209
2808-24	-7S	-7S	-22	222005-17C	-11	-422	-28	-38	-0648S	238
CR170-4	-1S	-1S	-6	-	-1	-	-12	-11	-0622S	68
CR170-6	-2S	-2S	-10	-	-21	-	-16	-14	-0622S	91
CR170-8	-14S	-3S	-12	222005-10C	-4	-	-16	-16	-0622S	106
EC115-4	-1S	-1S	-6	-	-1	-127	-12	-11	-0622S	68
EC115-6	-1S	-13S	-8	-	-2	-150	-12	-12	-0622S	79
EC115-8	-3S	-4S	-12	222005-10C	-4	-190	-16	-12	-0622S	98
EC115-10	-3S	-3S	-12	222005-21C	-5	-205	-16	-16	-0622S	122
EC115-12	-4S	-5S	-16	-	-6	-239	-20	-20	-0630S	142
EC115-16	-5S	-6S	-16	222005-13C	-9	-320	-20	-20	-0630S	173
EC115-20	-7S	-7S	-22	222005-14C	-11	-400	-28	-30	-0648S	238
EC115-24	-8S	-10S	-30	222005-17C	-12	-483	-32	-32	-0664C	288
EC115-32	-13S	-12S	-30	222005-19C	-30	-635	-46	-46	-0664C	366
EC215-4	-1S	-1S	-6	-	-1	-127	-12	-11	-0622S	68
EC215-6	-2S	-2S	-10	-	-3	-174	-16	-14	-0622S	91
EC215-8	-15S	-3S	-10	-	-5	-205	-16	-16	-0622S	122
EC215-10	-4S	-4S	-12	222005-21C	-6	-239	-20	-18	-0630S	122
EC215-12	-4S	-4S	-12	-	-6	-	-20	-18	-0633S	157
EC215-16	-7S	-6S	-16	-	-25	-357	-24	-24	-0630S	209
EC215-20	-7S	-9S	-22	-	-12	-422	-28	-28	-0648S	288
EC215-24	-8S	-8S	-30	-	-13	-508	-38	-38	-0648S	288
EC215-32	-13S	-12S	-30	-	-30	-635	-46	-46	-0664C	-
EC415-6	-3S	-3S	-12	-	-5	-	-18	-18	-0622S	122
EC415-8	-4S	-4S	-12	-	-6	-239	-20	-18	-0630S	122
EC415-10	-4S	-4S	-12	-	-6	-	-20	-18	-0633S	157
EC415-12	-6S	-14S	-16	-	-27	-300	-24	-22	-0648S	173
EC415-16	-7S	-7S	-22	-	-10	-381	-28	-30	-0648S	209
EC415-20	-8S	-9S	-22	-	-28	-445	-32	-38	-0648S	288
EC415-24	-10S	-10S	-30	-	-13	-	-38	-38	-0648S	366
EC415-32	-10S	-11S	-30	-	-31	-700	-54	-46	-0664C	-
EC420-12	-6S	-6S	-16	-	-24	-320	-24	-26	-0648S	185

*Sizes indicated are based on Hose O.D. only. If sleeve is to be placed over fittings, a larger sleeve size may be required, depending on type of fitting used.

Hose Part #	Steel protective coil spring* 900564	Steel protective coil sleeve* 900705	Plastic coil sleeve 900952	Internal support coil 222005, 222022	Support clamp 900729	Heavy duty support clamp FF90311	Nylon sleeve* FC425	Firesleeve* 624	Firesleeve clamp FF9217	Guardian sleeve FF90754
										
	dash size	dash size	dash size		dash size	dash size	dash size	dash size	dash size	dash size
EC420-16	-7S	-7S	-22	-	-10	-381	-28	-30	-0648S	209
EC420-20	-8S	-8S	-30	-	-13	-508	-38	-38	-0648S	288
EC420-24	-10S	-10S	-30	-	-14	-572	-38	-38	-0648S	366
EC420-32	-11S	-11S	-30	-	-15	-700	-54	-46	-0664C	-
EC525-12	-6S	-14S	-16	-	-27	-300	-24	-22	-0648S	173
EC525-16	-7S	-7S	-22	-	-10	-381	-28	-30	-0648S	209
EC525-20	-8S	-9S	-22	-	-28	-445	-32	-38	-0648S	288
EC525-24	-10S	-10S	-30	-	-13	-	-38	-38	-0648S	366
EC525-32	-10S	-11S	-30	-	-31	-700	-54	-46	-0664C	-
EC600-12	-6S	-6S	-16	-	-24	-320	-24	-26	-0648S	185
EC600-16	-7S	-7S	-22	-	-10	-381	-28	-30	-0648S	209
EC600-20	-8S	-8S	-30	-	-13	-508	-38	-38	-0648S	288
EC615-16	-7S	-9S	-22	-	-10	-381	-24	-28	-0648S	209
EC615-20	-8S	-8S	-30	-	-13	-508	-38	-38	-0648S	288
EC615-24	-10S	-10S	-30	-	-14	-572	-38	-38	-0648S	366
EC810-12	-6S	-6S	-16	-	-24	-320	-24	-26	-0648S	185
EC810-16	-7S	-7S	-22	-	-10	-381	-28	-28	-0648S	209
EC810-20	-8S	-8S	-30	-	-13	-508	-38	-38	-0648S	288
EC810-24	-10S	-10S	-30	-	-14	-572	-38	-38	-0648S	366
EC810-32	-11S	-11S	-30	-	-15	-700	-54	-46	-0664C	-
FC234-5	-1S	-2S	-10	-	-21	-150	-12	-11	-0622S	68
FC234-6	-2S	-3S	-12	-	-4	-174	-12	-12	-0622S	91
FC234-8	-3S	-4S	-12	222005-10C	-4	-190	-16	-12	-0622S	98
FC234-10	-4S	-5S	-16	222005-21C	-23	-239	-16	-13	-0622S	122
FC234-12	-5S	-14S	-16	222005-13C	-9	-280	-20	-16	-0630S	157
FC234-16	-6S	-7S	-22	222005-14C	-24	-320	-20	-20	-0630S	173
FC254-8	-4S	-4S	-12	-	-6	-254	-20	-18	-0630S	142
FC254-12	-6S	-6S	-16	-	-24	-320	-24	-26	-0648S	173
FC254-16	-7S	-7S	-22	-	-10	-381	-28	-30	-0648S	209
FC254-20	-8S	-9S	-22	-	-28	-445	-32	-32	-0648S	288
FC254-24	-10S	-10S	-30	-	-29	-	-38	-38	-0648S	366
FC254-32	-10S	-11S	-30	-	-31	-700	-54	-46	-0664C	-
FC273B-12	-6S	-14S	-16	-	-27	-300	-24	-22	-0648S	173
FC273B-16	-7S	-7S	-22	-	-10	-381	-28	-30	-0648S	209
FC273B-20	-8S	-8S	-30	-	-13	-508	-38	-38	-0648S	288
FC273B-24	-10S	-10S	-30	-	-14	-572	-38	-38	-0648S	366
FC273B-32	-11S	-11S	-30	-	-15	-700	-54	-46	-0664C	-
FC300-4	-1S	-1S	-6	-	-1	-137	-12	-11	-0622S	79
FC300-5	-12S	-13S	-8	-	-2	-	-12	-12	-0622S	79
FC300-6	-2S	-2S	-10	-	-21	-174	-16	-14	-0622S	91
FC300-8	-14S	-3S	-12	222005-10C	-4	-190	-16	-16	-0622S	98

*Sizes indicated are based on Hose O.D. only. If sleeve is to be placed over fittings, a larger sleeve size may be required, depending on type of fitting used.

Accessories

Accessories to hose chart

K

Hose Part #	Steel protective coil spring* 900564	Steel protective coil sleeve* 900705	Plastic coil sleeve 900952	Internal support coil 222005, 222022	Support clamp 900729	Heavy duty support clamp FF90311	Nylon sleeve* FC425	Firesleeve* 624	Firesleeve clamp FF9217	Guardian sleeve FF90754
										
	dash size	dash size	dash size		dash size	dash size	dash size	dash size	dash size	dash size
FC300-10	-4S	-4S	-12	222005-21C	-6	-239	-20	-18	-0630S	142
FC300-12	-5S	-5S	-16	222005-13C	-8	-280	-20	-20	-0630S	157
FC300-16	-6S	-6S	-16	222005-14C	-27	-320	-24	-24	-0648S	185
FC300-20	-7S	-7S	-22	222005-15C	-10	-381	-28	-30	-0648S	209
FC300-24	-9S	-9S	-22	222005-17C	-12	-445	-32	-32	-0648S	238
FC300-32	-10S	-10S	-30	222005-18C	-14	-572	-38	-38	-0648S	366
FC300-40	-	-12S	-	222005-19C	-16	-	-	-	-	-
FC310/ FC510-4	-12S	-1S	-6	-	-2	-137	-12	-12	-0622S	79
FC310/ FC510-6	-14S	-2S	-10	-	-4	-174	-12	-16	-0622S	91
FC310/ FC510-8	-3S	-3S	-12	-	-5	-205	-16	-16	-0630S	106
FC310/ FC510-10	-4S	-4S	-12	-	-6	-239	-20	-18	-0630S	142
FC310/ FC510-12	-5S	-5S	-16	-	-8	-280	-20	-22	-0630S	157
FC310/ FC510-16	-7S	-6S	-16	-	-25	-357	-24	-24	-0648S	209
FC310/ FC510-20	-9S	-8S	-30	-	-12	-422	-32	-30	-0648S	238
FC321-4	-1S	-1S	-6	-	-1	-137	-12	-11	-0622S	79
FC321-5	-12S	-13S	-8	-	-2	-150	-12	-12	-0622S	79
FC321-6	-2S	-2S	-10	-	-21	-174	-16	-14	-0622S	91
FC321-8	-14S	-3S	-12	222005-10C	-4	-190	-16	-16	-0622S	122
FC321-10	-4S	-4S	-12	222005-11C	-5	-239	-20	-18	-0630S	122
FC321-12	-5S	-5S	-16	222005-13C	-8	-280	-20	-20	-0630S	157
FC321-16	-6S	-6S	-16	222005-14C	-27	-320	-24	-22	-0630S	173
FC332-4	-1S	-1S	-6	-	-	-127	-12	-9	-0622S	68
FC332-6	-12S	-13S	-8	-	-21	-160	-16	-11	-0622S	91
FC332-8	-14S	-3S	-10	-	-4	-190	-16	-13	-0622S	98
FC332-10	-3S	-4S	-12	-	-5	-222	-20	-16	-0622S	122
FC332-12	-5S	-5S	-12	-	-23	-266	-20	-18	-0630S	157
FC350-4	-1S	-1S	-6	-	-1	-127	-12	-11	-0622S	79
FC350-5	-12S	-13S	-8	-	-2	-150	-12	-12	-0622S	79
FC350-6	-2S	-2S	-10	-	-21	-174	-16	-14	-0622S	91
FC350-8	-14S	-3S	-12	222005-10C	-4	-190	-16	-16	-0622S	106
FC350-10	-4S	-4S	-12	222005-21C	-6	-239	-20	-18	-0630S	142
FC350-12	-5S	-5S	-5	222005-13C	-8	-280	-20	-20	-0630S	157
FC350-16	-6S	-6S	-16	222005-14C	-27	-320	-24	-24	-0648S	173
FC350-20	-7S	-7S	-22	222005-15C	-10	-381	-28	-30	-0648S	209
FC350-24	-9S	-9S	-22	222005-17C	-12	-445	-32	-32	-0648S	288
FC355-4	-1S	-1S	-6	-	-1	-127	-12	-11	-0622S	79
FC355-5	-1S	-2S	-6	-	-1	-150	-12	-11	-0622S	91

*Sizes indicated are based on Hose O.D. only. If sleeve is to be placed over fittings, a larger sleeve size may be required, depending on type of fitting used.

Hose Part #	Steel protective coil spring* 900564	Steel protective coil sleeve* 900705	Plastic coil sleeve 900952	Internal support coil 222005, 222022	Support clamp 900729	Heavy duty support clamp FF90311	Nylon sleeve* FC425	Firesleeve* 624	Firesleeve clamp FF9217	Guardian sleeve FF90754
										
	dash size	dash size	dash size		dash size	dash size	dash size	dash size	dash size	dash size
FC355-6	-12S	-1S	-8	-	-2	-174	-12	-12	-0622S	91
FC355-8	-2S	-13S	-10	-	-3	-190	-16	-12	-0622S	106
FC355-10	-3S	-3S	-12	222005-10C	-5	-239	-16	-13	-0622S	142
FC355-12	-4S	-5S, -4S	-6	222005-21C	-6	-280	-20	-16	-0630S	157
FC355-16	-5S	-6S	-16	222005-13C	-9	-320	-20	-20	-0630S	173
FC355-20	-6S	-7S	-22	222005-14C	-24	-381	-24	-22	-0648S	219
FC355-24	-7S	-7S	-22	222005-15C	-10	-445	-28	-30	-0648S	288
FC355-32	-9S	-9S	-22	222005-17C	-12	-572	-32	-32	-0648S	366
FC466-4	-1S	-1S	-6	-	-1	-127	-12	-9	-0622S	68
FC466-6	-12S	-13S	-8	-	-21	-160	-16	-11	-0622S	91
FC466-8	-14S	-3S	-10	-	-4	-190	-16	-13	-0622S	98
FC466-10	-3S	-4S	-12	-	-5	-222	-20	-16	-0622S	122
FC498/ FC598-4	-1S	-1S	-6	-	-	-127	-12	-9	-0622S	68
FC498/ FC598-6	-12S	-13S	-8	-	-21	-160	-16	-11	-0622S	91
FC498/ FC598-8	-14S	-3S	-10	-	-4	-190	-16	-13	-0622S	98
FC498/ FC598-10	-3S	-4S	-12	-	-5	-222	-20	-16	-0622S	122
FC498/ FC598-12	-5S	-5S	-12	-	-23	-266	-20	-18	-0630S	157
FC500-12	-6S	-14S	-16	-	-27	-300	-24	-22	-0648S	173
FC500-16	-7S	-7S	-22	-	-10	-381	-28	-30	-0648S	209
FC500-20	-8S	-8S	-22	-	-28	-	-32	-30	-0648S	288
FC500-24	-10S	-10S	-30	-	-13	-	-38	-38	-0648S	366
FC500-32	-11S	-11S	-30	-	-15	-700	-54	-46	-0664C	-
FC639-6	-2S	-2S	-10	-	-3	-174	-16	-14	-0622S	91
FC639-8	-15S	-3S	-10	-	-5	-205	-16	-16	-0622S	122
FC639-10	-4S	-5S	-16	-	-6	-239	-20	-20	-0630S	142
FC639-12	-5S	-6S	-16	222005-14C	-9	-280	-22	-22	-0648S	173
FC639-16	-7S	-7S	-22	222005-15C	-10	-357	-24	-28	-0648S	209
FC647-4	-1S	-1S	-6	-	-1	-127	-12	-9	-0622S	68
FC647-6	-12S	-13S	-8	-	-21	-160	-16	-11	-0622S	91
FC647-8	-14S	-3S	-10	-	-4	-190	-16	-13	-0622S	106
FC647-10	-3S	-4S	-12	-	-5	-222	-20	-16	-0622S	122
FC647-12	-5S	-5S	-12	-	-23	-266	-20	-18	-0630S	157
FC650-6	-2S	-2S	-10	-	-21	-160	-16	-14	-0622S	91
FC650-8	-14S	-3S	-12	222005-10C	-4	-190	-16	-16	-0622S	98
FC650-10	-3S	-3S	-12	-	-5	-205	-16	-16	-0622S	122
FC650-12	-4S	-5S	-16	-	-6	-254	-20	-20	-0630S	142
FC650-4	-1S	-1S	-6	-	-1	-	-12	-11	-0622S	68
FC693-4	-1S	-13S	-8	-	-2	-	-12	-12	0622S	79

*Sizes indicated are based on Hose O.D. only. If sleeve is to be placed over fittings, a larger sleeve size may be required, depending on type of fitting used.

Accessories

Accessories to hose chart

K

Hose Part #	Steel protective coil spring* 900564	Steel protective coil sleeve* 900705	Plastic coil sleeve 900952	Internal support coil 222005, 222022	Support clamp 900729	Heavy duty support clamp FF90311	Nylon sleeve* FC425	Firesleeve* 624	Firesleeve clamp FF9217	Guardian sleeve FF90754
										
	dash size	dash size	dash size		dash size	dash size	dash size	dash size	dash size	dash size
FC693-6	-1S	-2S	-10	-	-4	-	-16	-16	-0622S	98
FC693-8	-3S	-3S	-12	-	-5	-	-18	-18	-0622S	122
FC699-4	-12S	-1S	-6	-	-2	-	-12	-12	-0622S	68
FC699-6	-14S	-2S	-10	-	-4	-174	-16	-16	-0622S	91
FC699-8	-3S	-3S	-12	-	-5	-205	-16	-16	-0630S	106
FC699-10	-4S	-4S	-12	-	-6	-239	-20	-18	-0630S	142
FC699-12	-5S	-5S	-16	-	-8	-280	-20	-22	-0630S	157
FC735-4	-1S	-1S	-6	-	-1	-127	-12	-11	-0622S	68
FC735-6	-2S	-2S	-10	-	-3	-171	-16	-16	-0622S	91
FC735-8	-15S	-3S	-10	-	-5	-205	-16	-16	-0622S	122
FC735-10	-4S	-4S	-12	-	-6	-254	-20	-18	-0630S	142
FC735-12	-5S	-14S	-16	-	-9	-280	-24	-22	-0648S	173
FC735-16	-7S	-7S	-22	222005-15C	-10	-357	-24	-28	-0648S	185
FC735-20	-7S	-9S	-22	-	-12	-422	-28	-28	-0648S	288
FC736-6	-3S	-3S	-12	-	-5	-205	-16	-16	-0630S	122
FC736-8	-4S	-4S	-12	-	-6	-239	-20	-18	-0630S	142
FC736-10	-5S	-5S	-16	-	-8	-280	-20	-20	-0630S	157
FC736-12	-6S	-6S	-16	-	-24	-300	-24	-26	-0630S	209
FC736-16	-7S	-7S	-22	-	-11	-381	-28	-28	-0630S	288
FC736-20	-8S	-8S	-22	-	-28	-	-32	-30	-0648S	288
FC839B-4	-1S	-1S	-6	-	-1	-127	-12	-11	-0622S	68
FC839B-6	-12S	-2S	-10	-	-21	-160	-16	-14	-0622S	91
FC839B-8	-14S	-3S	-12	-	-5	-205	-16	-18	-0622S	122
FC839B-10	-4S	-5S	-16	-	-6	-239	-20	-20	-0630S	142
FC839B-12	-5S	-6S	-16	-	-9	-280	-22	-22	-0648S	173
FC839B-16	-7S	-7S	-22	-	-10	-381	-28	-30	-0648S	209
GH100-10	-3S	-4S	-12	-	-5	-222	-20	-16	-0622S	122
GH100-12	-5S	-5S	-12	-	-23	-266	-20	-18	-0630S	157
GH100-4	-1S	-1S	-6	-	-	-127	-12	-9	-0622S	79
GH100-6	-12S	-13S	-8	-	-21	-160	-16	-11	-0622S	98
GH100-8	-14S	-3S	-10	-	-4	-190	-16	-13	-0622S	98
GH120-4	-1S	-13S	-8	-	-2	-137	-12	-12	-0622S	79
GH120-6	-2S	-2S	-10	-	-3	-171	-16	-16	-0622S	91
GH120-8	-14S	-3S	-12	-	-5	-205	-16	-18	-0622S	122
GH120-10	-4S	-5S	-16	-	-6	-239	-20	-20	-0630S	142
GH120-12	-5S	-6S	-16	-	-9	-280	-22	-22	-0648S	173
GH120-16	-7S	-7S	-22	-	-10	-357	-24	-28	-0648S	209
GH120-20	-9S	-8S	-30	-	-	-422	-32	-30	-0648S	288
GH120-24	-10S	-15S	-30	-	-29	-508	-38	-38	-0648S	288
GH120-32	-13S	-12S	-30	-	-30	-635	-46	-46	-0664C	-
GH194-4	-1S	-1S	-6	-	-1	-137	-12	-11	-0622S	79

*Sizes indicated are based on Hose O.D. only. If sleeve is to be placed over fittings, a larger sleeve size may be required, depending on type of fitting used.

Hose Part #	Steel protective coil spring* 900564	Steel protective coil sleeve* 900705	Plastic coil sleeve 900952	Internal support coil 222005, 222022	Support clamp 900729	Heavy duty support clamp FF90311	Nylon sleeve* FC425	Firesleeve* 624	Firesleeve clamp FF9217	Guardian sleeve FF90754
										
	dash size	dash size	dash size		dash size	dash size	dash size	dash size	dash size	dash size
GH194-6	-2S	-2S	-10	-	-3	-174	-16	-14	-0622S	91
GH194-8	-15S	-3S	-10	-	-5	-205	-16	-16	-0622S	122
GH194-10	-4S	-4S	-12	-	-6	-239	-20	-18	-0630S	142
GH194-12	-4S	-4S	-12	-	-6	-	-20	-18	-0633S	157
GH194-16	-6S	-6S	-22	-	-25	-357	-24	-26	-0648S	209
GH194-20	-9S	-8S	-30	-	-1	-445	-32	-30	-0648S	288
GH194-24	-8S	-8S	-30	-	-13	-508	-38	-38	-0648S	288
GH194-32	-13S	-12S	-30	-	-30	-635	-46	-46	-0664C	-
GH195-4	-1S	-13S	-8	-	-2	-150	-12	-12	-0622S	79
GH195-6	-1S	-2S	-10	-	-4	-190	-16	-16	-0622S	98
GH195-8	-3S	-3S	-12	-	-5	-222	-18	-18	-0622S	122
GH195-10	-4S	-5S	-16	-	-6	-266	-20	-20	-0630S	142
GH195-12	-5S	-6S	-16	-	-9	-300	-22	-22	-0648S	173
GH195-16	-7S	-9S	-22	-	-10	-381	-28	-28	-0648S	209
GH195-20	-8S	-10S	-30	-	-12	-483	-32	-32	-0664C	288
GH195-24	-10S	-11S	-30	-	-13	-	-38	-38	-0648S	366
GH195-32	-13S	-12S	-30	-	-30	-635	-46	-46	-0664C	-
GH466-20	-8S	-8S	-30	-	-13	-508	-38	-38	-0648S	288
GH493-6	-15S	-3S	-12	-	-5	-205	-16	-16	-0622S	106
GH493-8	-3S	-4S	-12	-	-6	-239	-20	-20	-0648S	122
GH493-10	-4S	-5S	-16	-	-8	-280	-20	-22	-0648S	157
GH493-12	-5S	-6S	-16	-	-27	-300	-24	-24	-0648S	173
GH493-16	-7S	-7S	-22	-	-10	-381	-28	-28	-0648S	209
GH493-20	-8S	-10S	-22	-	-28	-	-32	-38	-0648S	288
GH493-24	-8S	-10S	-30	-	-29	-	-38	-38	-0648S	366
GH493-32	-13S	-11S	-30	-	-31	-	-46	-46	-0664S	-
GH506-12	-6S	-6S	-16	-	-24	-320	-24	-26	-0648S	173
GH506-16	-7S	-7S	-22	-	-10	-381	-28	-30	-0648S	209
GH506-20	-8S	-9S	-22	-	-28	-445	-32	-32	-0648S	288
GH663-4	-1S	-1S	-6	-	-1	-137	-12	-11	-0622S	79
GH663-6	-2S	-2S	-10	-	-3	-174	-16	-14	-0622S	91
GH663-8	-15S	-3S	-10	-	-5	-205	-16	-16	-0622S	122
GH663-12	-5S	-5S	-16	-	-8	-280	-24	-22	-0648S	173
GH663-16	-7S	-6S	-22	-	-25	-357	-24	-26	-0648S	209
GH663-20	-9S	-8S	-30	-	-12	-422	-32	-30	-0648S	288
GH663-24	-8S	-8S	-30	-	-13	-483	-38	-38	-0648S	288
GH663-32	-13S	-12S	-30	-	-30	-635	-46	-46	-0664C	-
GH681-3	-1S	-1S	-6	-	-1	-	-12	-11	-0622S	68
GH681-4	-1S	-1S	-6	-	-1	-127	-12	-11	-0622S	68
GH681-5	-1S	-1S	-6	-	-1	-137	-12	-11	-0622S	79
GH681-6	-12S	-2S	-10	-	-21	-160	-16	-14	-0622S	91

*Sizes indicated are based on Hose O.D. only. If sleeve is to be placed over fittings, a larger sleeve size may be required, depending on type of fitting used.

Accessories

Accessories to hose chart

K

Hose Part #	Steel protective coil spring* 900564	Steel protective coil sleeve* 900705	Plastic coil sleeve 900952	Internal support coil 222005, 222022	Support clamp 900729	Heavy duty support clamp FF90311	Nylon sleeve* FC425	Firesleeve* 624	Firesleeve clamp FF9217	Guardian sleeve FF90754
										
	dash size	dash size	dash size		dash size	dash size	dash size	dash size	dash size	dash size
GH681-8	-14S	-3S	-12	-	-4	-205	-16	-16	-0622S	98
GH681-10	-3S	-3S	-12	-	-5	-205	-16	-16	-0622S	122
GH681-12	-4S	-5S	-16	-	-6	-254	-20	-20	-0630S	142
GH681-16	-5S	-6S	-16	222005-13C	-9	-320	-20	-20	-0630S	173
GH681-20	-7S	-7S	-22	222005-14C	-11	-400	-28	-30	-0648S	238
GH681-24	-8S	-10S	-30	-	-12	-483	-32	-32	-0664C	288
GH681-32	-13S	-12S	-30	-	-30	-635	-46	-46	-0664C	-
GH781-4	-1S	-13S	-8	-	-2	-137	-12	-12	-0622S	79
GH781-6	-2S	-2S	-10	-	-3	-174	-16	-16	-0622S	91
GH781-8	-14S	-3S	-12	-	-5	-205	-16	-18	-0622S	142
GH781-10	-4S	-5S	-12	-	-6	-239	-20	-18	-0630S	142
GH781-12	-5S	-14S	-16	-	-9	-280	-24	-22	-0648S	173
GH781-16	-7S	-7S	-22	-	-10	-357	-24	-28	-0648S	209
GH781-20	-7S	-9S	-22	-	-12	-422	-28	-28	-0648S	288
GH781-24	-8S	-8S	-30	-	-13	-508	-38	-38	-0648S	288
GH781-32	-13S	-12S	-30	-	-30	-635	-46	-46	-0664C	288
GH793-4	-1S	-13S	-8	-	-2	-150	-12	-12	-0622S	79
GH793-6	-15S	-2S	-10	-	-4	-190	-16	-16	-0622S	98
GH793-8	-3S	-3S	-12	-	-5	-222	-16	-18	-0622S	122
GH793-10	-4S	-5S	-16	-	-6	-266	-20	-20	-0630S	157
GH793-12	-5S	-6S	-16	-	-9	-300	-20	-22	-0648S	173
GH793-16	-7S	-9S	-22	-	-10	-381	-24	-28	-0648S	209
GH793-20	-8S	-10S	-30	-	-12	-483	-32	-32	-0664C	288
GH793-24	-10S	-10S	-30	-	-13	-	-38	-38	-0648S	366
GH793-32	-13S	-12S	-30	-	-30	-635	-46	-46	-0664C	-
H201-4	-1S	-1S	-6	-	-	-127	-12	-9	-0622S	68
H201-6	-12S	-13S	-8	-	-21	-160	-16	-11	-0622S	98
H201-8	-14S	-3S	-10	-	-4	-190	-16	-13	-0622S	68
H201-10	-3S	-4S	-12	-	-5	-222	-20	-16	-0622S	122
H201-12	-5S	-5S	-12	-	-23	-266	-20	-18	-0630S	157

*Sizes indicated are based on Hose O.D. only. If sleeve is to be placed over fittings, a larger sleeve size may be required, depending on type of fitting used.